

## Doppelnippel

Außengewinde : Außengewinde



Messing



Edelstahl



Stahl verzinkt

AG : AG
1/8" : 1/8"
1/4" : 1/4"
1/4" : 1/4"
3/8" : 3/8"
3/8" : 3/8"
1/2" : 1/2"
3/4" : 3/4"
1" : 1"


R+M Nr.	P	I
570 10	400 bar	20 mm
570 40	400 bar	23 mm
570 45	400 bar	30 mm
570 70	400 bar	25 mm
570 71	400 bar	30 mm
570 90	400 bar	30 mm
571 10	250 bar	37 mm
571 30	150 bar	41 mm

R+M Nr.	P	I
570 19	500 bar	25 mm
570 49	500 bar	29 mm
570 79	500 bar	35 mm
570 99	500 bar	42 mm
571 19	400 bar	44 mm
571 39	250 bar	43 mm

R+M Nr.	P	I
570 18	500 bar	25 mm
570 48	500 bar	29 mm
570 78	500 bar	34 mm
570 98	500 bar	38 mm
571 18	400 bar	42 mm
571 38	250 bar	48 mm

## Reduziernippel

Innengewinde : Außengewinde

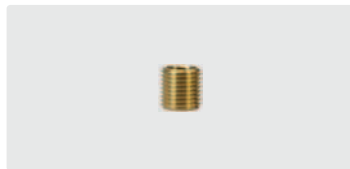

Rund. Messing



Sechskant. Messing



Sechskant. Edelstahl

IG : AG
1/8" : 1/4"
1/8" : 3/8"
1/8" : 1/2"
1/4" : 3/8"
1/4" : 1/2"
3/8" : 1/2"
3/8" : 3/4"
1/2" : 3/4"
3/4" : 1"

R+M Nr.	P	I
575 11	400 bar	13 mm

R+M Nr.	P	I
575 10	400 bar	13 mm
575 20	400 bar	14 mm
575 45	400 bar	20 mm
575 30	400 bar	14 mm
575 40	400 bar	20 mm
575 50	400 bar	20 mm
575 60	250 bar	20 mm
575 70	250 bar	20 mm
575 80	150 bar	23 mm

R+M Nr.	P	I
575 19	500 bar	18 mm
575 29	500 bar	18 mm
575 459	500 bar	18 mm
575 39	500 bar	20 mm
575 49	500 bar	25 mm
575 59	500 bar	23 mm
575 69	250 bar	24 mm
575 79	250 bar	27 mm
575 89	150 bar	27 mm



Sechskant. Stahl verzinkt

IG : AG
1/8" : 1/4"
1/8" : 3/8"
1/4" : 3/8"
1/4" : 1/2"
1/4" : 3/4"
3/8" : 1/2"
3/8" : 3/4"
1/2" : 3/4"
1/2" : 1"

R+M Nr.	P	I
575 18	500 bar	18 mm
575 28	500 bar	20 mm
575 38	500 bar	20 mm
575 48	500 bar	25 mm
575 468	500 bar	27 mm
575 58	500 bar	24 mm
575 68	250 bar	27 mm
575 78	250 bar	27 mm
575 758	150 bar	30 mm

Symbole IG Innengewinde AG Außengewinde I Höhe P Druck