

Kombidüsen

Dreifachdüsen



M22 AG. Strahlrohr mit Dreifachdüse. Max. 250 bar / 80 °C

R+M Nr.	D	C	↔	M*
657 545 03	045	blau	430 mm	Stahl verzinkt
657 555 03	055	rot	430 mm	Stahl verzinkt
657 560 03	06	grün	430 mm	Stahl verzinkt

R+M Nr.	D	C




1/4" IG. Gehäuse schwarz. Max. 250 bar / 80 °C

R+M Nr.	D	C
657 545	045	blau
657 555	055	rot
657 560	06	grün

M18 IG. Gehäuse schwarz. Max. 250 bar / 80 °C

R+M Nr.	D	C
657 545 1	045	blau
657 555 1	055	rot
657 560 1	06	grün


Funktionsweise Dreifachdüsen

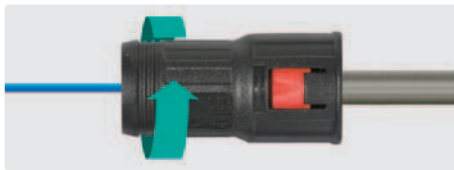

Hochdruck Punktstrahl




Hochdruck Breitstrahl 25°

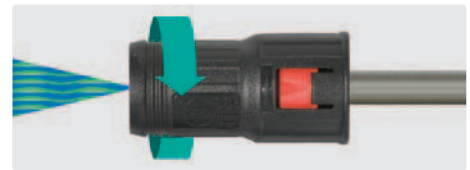

Niederdruck Breitstrahl 40°


Schwallregeldüsen

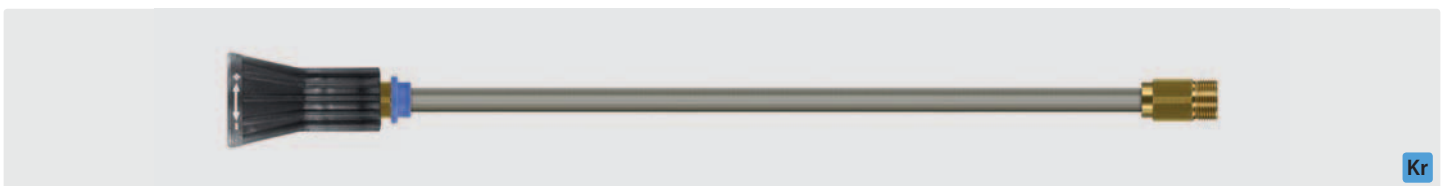

M22 AG. Strahlrohr mit Schwallregeldüse. Spray angle 25°. Max. 200 bar / 150 °C

R+M Nr.	D	↔	M*
657 340 30	04	430 mm	Stahl verzinkt
657 345 30	045	430 mm	Stahl verzinkt
657 350 30	05	430 mm	Stahl verzinkt
657 355 30	055	430 mm	Stahl verzinkt
657 370 30	07	430 mm	Stahl verzinkt

R+M Nr.	D	↔	M*
657 340 309	04	430 mm	Edelstahl
657 345 309	045	430 mm	Edelstahl
657 350 309	05	430 mm	Edelstahl
657 355 309	055	430 mm	Edelstahl
657 370 309	07	430 mm	Edelstahl

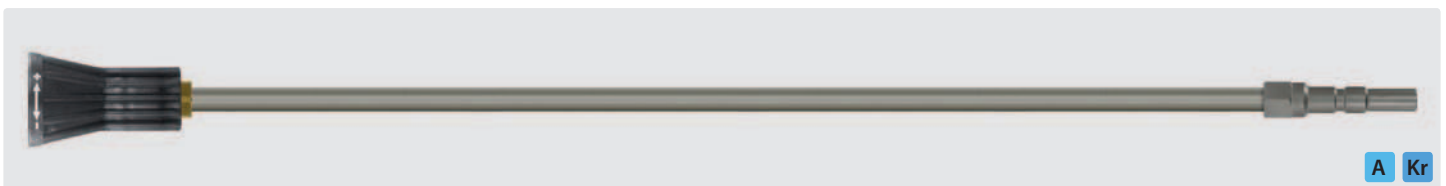

Stecknippel KW. Strahlrohr mit Schwallregeldüse ohne Düse. Max. 200 bar / 150 °C

R+M Nr.	↔	M*
657 300 7	600 mm	Stahl verzinkt

R+M Nr.	↔	M*
657 300 79	600 mm	Edelstahl

* Strahlrohr